




STANDARD 5' SIDEWALK
WITH FLARED SLOPES
TYPE ①
NTS

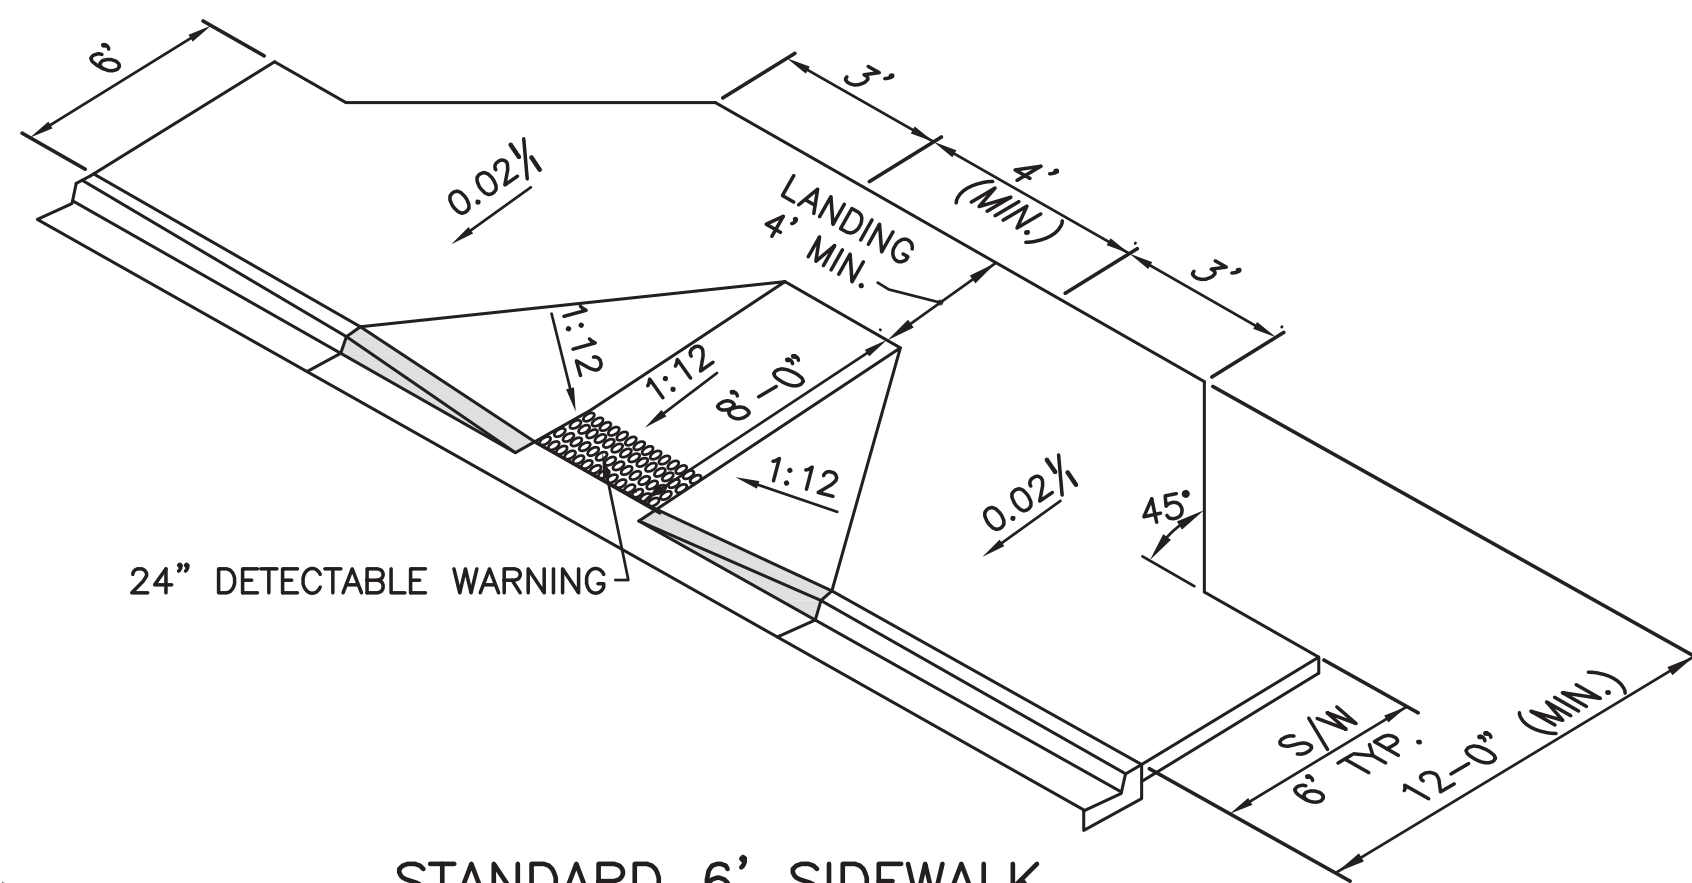


STANDARD 6' SIDEWALK
WITH FLARED RAMP
TYPE ②
NTS

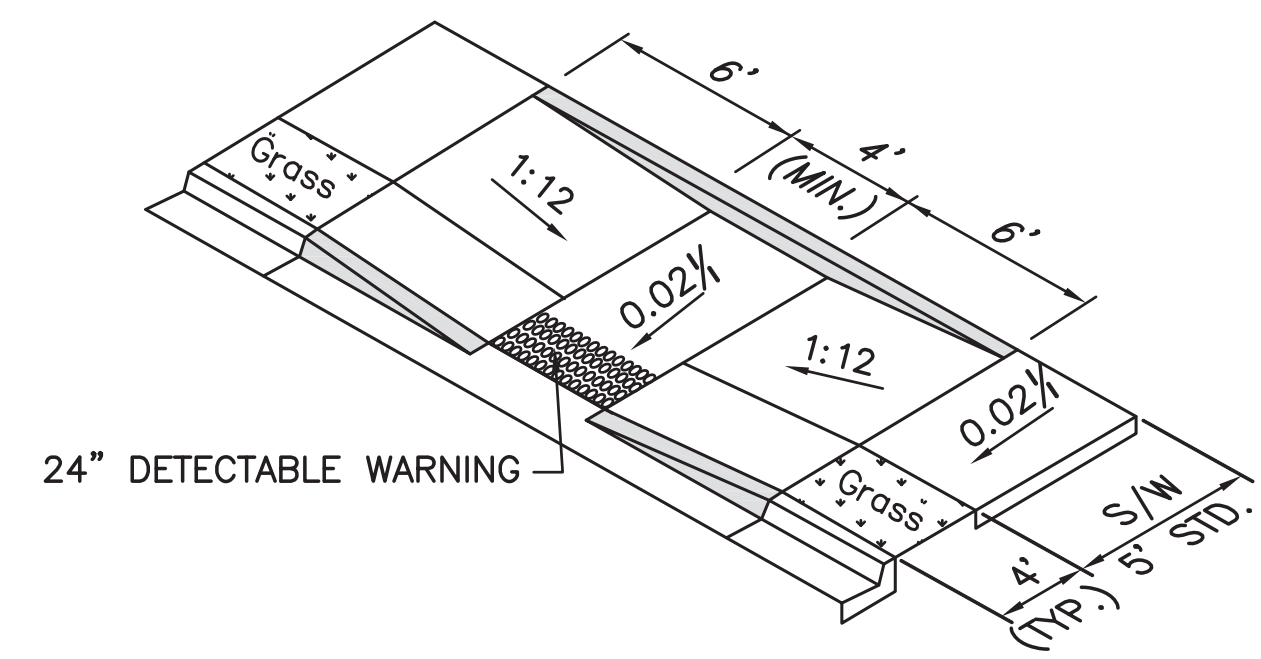

STANDARD 5' SIDEWALK
WITH PAVED RAMP
TYPE ③
NTS

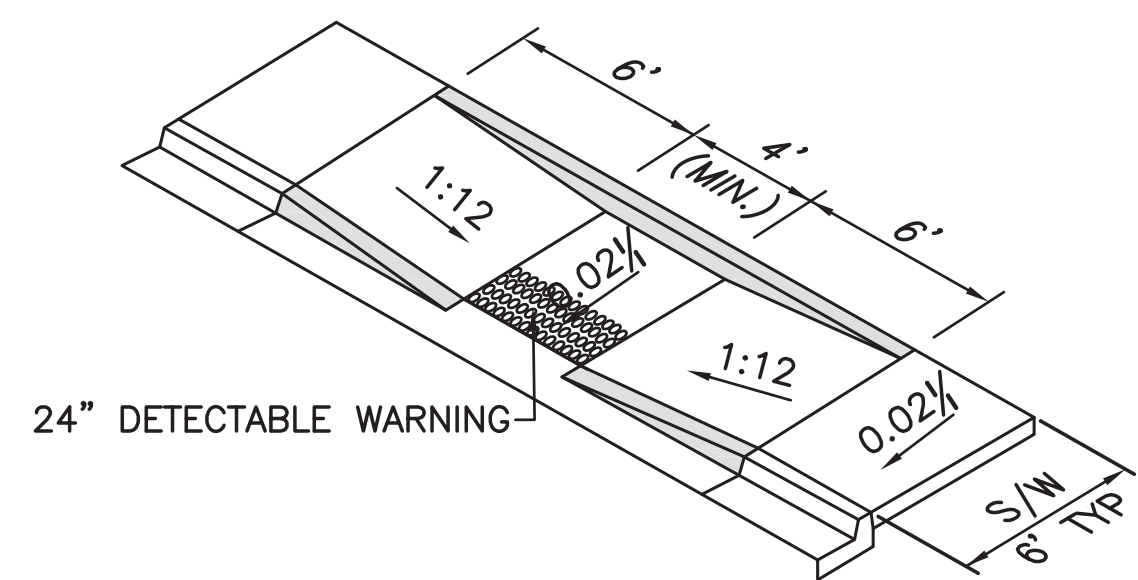

STANDARD 6' SIDEWALK
WITH PAVED RAMP
TYPE ④
NTS

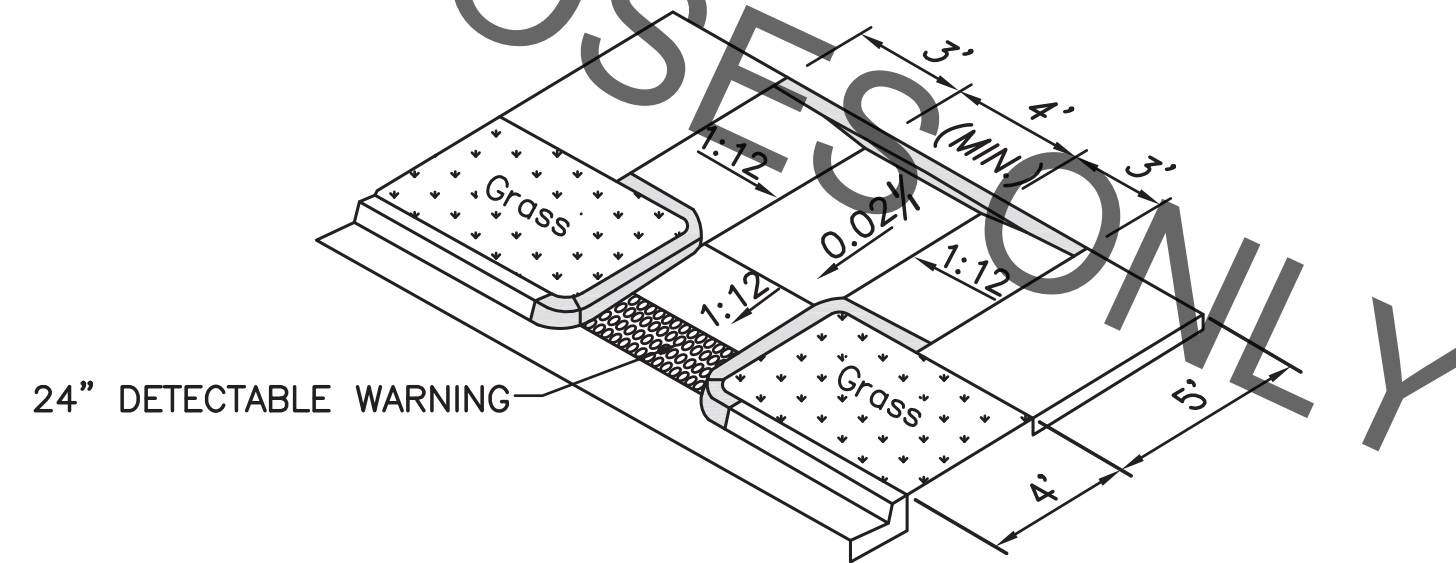

STANDARD 5' SIDEWALK
WITH CURBED RAMP
TYPE ⑤
(REFER TO NOTES, TYP.)
NTS

■ AREAS OF CURB MODIFICATION

NOTES:

1. LOCATION OF ALL TRAFFIC STRIPING, CROSS BARS, STOP BARS, AND MARKERS SHALL BE BASED ON SITE SPECIFIC DESIGN APPROVED BY THE CHIEF TRAFFIC ENGINEER. REFER TO 905-50 SHEET 7.
2. THE LAYOUT OF HANDICAP RAMPS ARE BASED ON USE OF 6 INCH BARRIER CURB. ADJUSTMENTS TO DIMENSIONS WILL BE REQUIRED SHOULD MOUNTABLE CURB IS USED.
3. RAMP CONFIGURATIONS MUST BE APPROVED BY THE CHIEF TRAFFIC ENGINEER.

FOR INFORMATION PURPOSES ONLY



STANDARD PLAN NO. 907-01	DATED AUGUST 8, 2008	SHEET NO. 4 OF 6
SIDEWALK AND HANDICAP RAMPS (RAMP TYPES)		
ENGINEERING DIVISION DEPARTMENT OF PUBLIC WORKS CITY OF BATON ROUGE & PARISH OF EAST BATON ROUGE		
DESIGNED GLP	DRAWN GLP	CHECKED GLP
		APPROVED T. STEPHENS

DATE	DESCRIPTION REVISIONS	BY